


Live Lock CA1800/CA18000 Series.

Retaining Rings.


CA1825 Wire Form



Material:
Elgiloy Wire
Finish:
Passivated per QQ-P-35
Heat Treat:
Spring Tempered
Weight:
.019 lbs. per hundred (approx.)

IMPORTANT: Chamfered side must face toward head of stud nut.

CA18377 Wire Form Caged

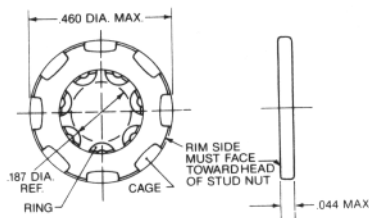


Weight:
.071 lbs. per hundred (approx.)

IMPORTANT: Rim side must face toward head of stud nut.

| Material | Part No. |
|--|----------|
| Ring: Elgiloy Wire Finish: Passivated per QQ-P-35 Heat Treat: Spring Tempered Cage: 300 Series CRES Finish: Passivated per QQ-P-35 | CA18377 |

Installation Tool for CA1825 or CA18377 Retaining Rings




Notes:

- Above retaining rings can be used with CA1800 series stud nuts only.
- Fifty (50) retaining rings are sold mounted on an installation tool to insure proper installation.

CA18132 Solid, 3-Tabs

Use with stud nut part number CA18121-() series or CA18161-() series only.



Weight:
.036 lbs. per hundred (approx.)

| Material | Part No. |
|--|----------|
| Material: 17-7PH CRES Finish: Passivated per QQ-P-35 Heat Treat: Per MIL-H-6875 | CA18132 |
| Same as Part No. CA18132 Except Finish: Cadmium Plated per QQ-P-416, Type II, Class 2 | CA18132C |

Installation Tool for CA18132 Retaining Ring CA18132-T11

